

Atf RÉMIN

manual

IT

- **A:** Pannello comandi con manometro olio usato, rubinetti/commutatori di fase e flussimetri
- **B:** Kit raccordi e tubi per vetture europee e asiatiche (di serie)
- **C:** InfoPack: Password di accesso gratuito (per 12 mesi) al sito Datamotiv per consultazione banca dati, informazioni tecniche riservate (foto, ubicazione raccordi, etc) (di serie)
- **D:** Iniettore additivo di 500ml con protezione contro manovre errate
- **E:** Inversione tubi manuale (integrato)
- **F:** Taniche olio nuovo/usato da 20 lt rimuovibili
- **G:** Nuovo filtro sinterizzato con magnete (riusabile)
- **H:** Contaltri magnetici: Utili per il controllo visivo dei livelli (olio usato, olio nuovo)
- **I:** Uso facilitato dell'apparecchio




EN

- **A:** Control panel with used oil pressure gauge, taps/phase switches and flowmeters
- **B:** Kit of couplings and hoses for European and Asiatic vehicles (standard included)
- **C:** InfoPack: Password for free access (for 12 months) to the website Datamotiv to consult database, reserved technical information (pictures, fitting location, etc)
- **D:** 500ml additive injector with protection against operational errors
- **E:** Manual hoses inversion (integrated)
- **G:** 20 liter removable oil containers for new/used oil
- **G:** New sintered magnetic filter (reusable)
- **H:** Magnetic litre-counters: Useful for visual control of the levels (used oil, new oil)
- **I:** Facilitated use of the appliance


ATF RÉMIN
COD. 02.023.55

ATF RÉMIN SPIN USER'S GUIDE					
	A	B	C	ATF PUMP	CAR ENGINE
VERIFY THE PRESSURE PRESENCE ON THE GAUGE				OFF	ON
ADDITIVE INJECTION				ON	OFF
CLEANING				OFF	ON
EMPTY THE OIL PAN				OFF	ON
REMOVE THE OIL PAN				OFF	OFF
RADIATOR CLEANING				ON	OFF
FILTER CHANGE & OIL PAN REMOUNT				OFF	OFF
FILL THE PAN WITH NEW OIL				ON	OFF
OIL CHANGE IN THE TORQUE CONVERTER ADJUST SLOWLY THE TAP				ON	ON
RESTORE THE CONNECTION				OFF	OFF
OIL LEVEL CONTROL				ON	OFF
USED OIL DISCHARGE				ON	OFF

ATF RÉMIN
C l e a n e r & O i l E x c h a n g e r

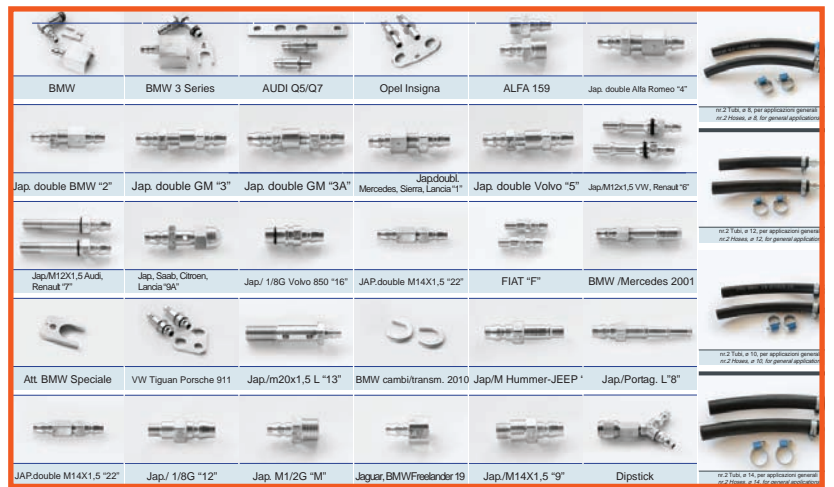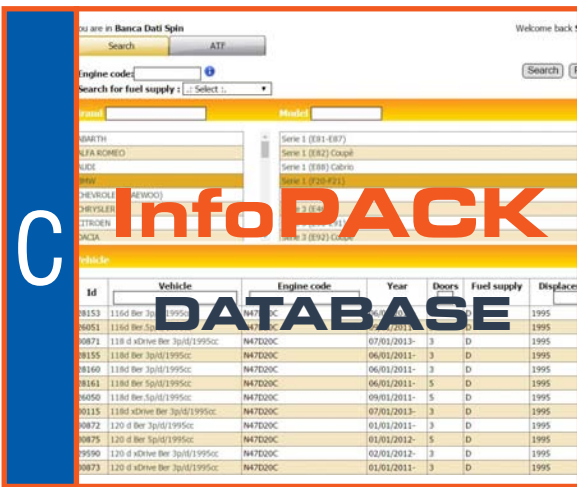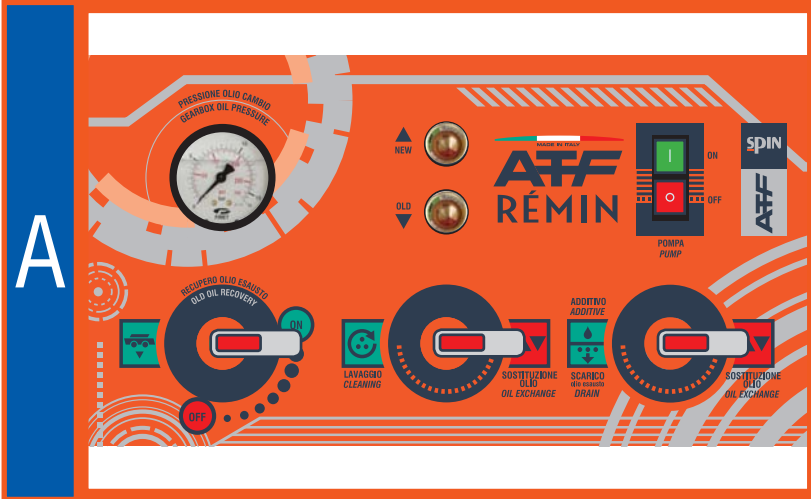

					 NEW!
CARATTERISTICHE TECNICHE	S-DRIVE 4500 cod. 02.023.40	S-DRIVE 5000 cod. 02.023.50	ATF 4000 BASIC cod. 02.023.10	ATF 4000 PROFI cod. 02.023.11	ATF START cod. 02.023.42
Display a colori touch screen 5"	√	√	-	-	-
Display grafico 240x64 monocromatico	-	-	√	√	√
Software a icone di immediata comprensione	√	√	√	√	√
Software multilingue	√	√	√	√	√
Pompa	1	2	2	2	1
Misura olio: 2 bilance elettroniche	√	√	√	√	√
Misura pressione olio uscita cambio	√	√	√	√	√
Misura pressione olio uscita ATF	-	√	√	√	-
Funzione AWS: Correzione automatica peso specifico olio nuovo	√	√	manual	manual	manual
Funzione warm-up automatico (avvio del ciclo automatico al raggiungimento della temperatura minima ottimale)	√	√	-	-	-
Lavaggio circuito di aspirazione olio nuovo	√	√	-	-	-
Misura temperatura olio usato	√	√	√	√	√
Kit dipstick	-	√	√	√	-
Iniezione additivo automatica	√	√	√	√	manuale guidata/ manual guided
Possibilità di operare in modo automatico o manuale	√	√	√	√	semiautomatico
Aggiornamento software e database via USB	√	√	-	-	-
Flussimetri (old/new)	√ illuminati/ backlight	√ illuminati/ backlight	√ illuminati/ backlight	√ illuminati/ backlight	tubi trasparenti, 3 mt/ transparent hoses, 3 mt
Taniche olio nuovo/usato	2 x 20lt	2 x 30lt	2 x 30lt	2 x 30lt	2 x 20lt
Nuovo filtro sinterizzato riutilizzabile con magnete	√	√	√	√	√
2 cassette raccordi e tubi vetture europee e asiatiche	√	√	√	√	√
Stampante	Optional	√	Optional	√	Optional
Kit InfoPack (abbonamento per 12 mesi)	√	√	√	√	√
Software cambio olio servosterzi con adattatori a richiesta	√	√	√	√	-
Banca dati integrata con marca, versione, numero rapporti, tipo di cambio, quantità olio; il raccordo da usare e il tipo/marca di olio è inseribile da parte dell'utente	√	√	-	-	-
Invertitore tubi direzione olio (esterno)	Optional	Optional	Optional	Optional	Integrato Integrated



ATF REMIN
cod. 02.023.55

ATF 3000 PRO
cod. 02.022.70

TECHNICAL FEATURES

-	-	Color touch display 5"
-	-	Monochromatic graphic display 240x64
-	-	Software with icons easy to use
-	-	Multilingual software
1	1	Pump
visiva / visual	visiva / visual	Oil Measurement: 2 electronic scales
✓	✓	Gearbox's outlet oil pressure measurement
-	✓	ATF's outlet oil pressure measurement
-	-	AWS function: Automatic new oil specific weight correction
-	-	Automatic Warm-Up function (starting of the automatic cycle upon reaching the min. optimal temperature)
-	-	Washing of the new oil suction circuit
-	-	Measurement of the waste oil temperature
optional	✓	Dipstick kit
manuale guidata/ manual guided	manuale guidata/ manual guided	Automatic additive injection
manual	manual	Possibility to operate in automatic or manual mode
-	-	Software and database updatable via USB
✓	✓	Flowmeters (old/new)
2x20lt	2 x 25lt con illuminazione/ with led bar	New and waste oil tanks
✓	filtra olio classico/ classic oil filter	New sintered reusable filter with magnet
✓	✓	2 cases of couplings and hoses for European and Asiatic vehicles
-	-	Printer
✓	✓	InfoPack kit (subscription for 12 months)
-	-	Software for power steering oil change with optional adapters
-	-	Integrated database with brand, version, number of ratios, gearbox type, oil quantity, oil code; the connection to be used and the oil type/brand can be inserted manually by the operator
Standard	Optional	Oil flow hose inversion device (external)


ATF

**Accessori INCLUSI
STANDARD accessories**


**InfoPACK
DATABASE**

**FREE ACCESS
TO MORE THAN
4000 MODELS**

**ACCESSO
ALLA BANCA DATI
CAMBI AUTOMATICI
CON PIU' DI 4000 MODELLI**

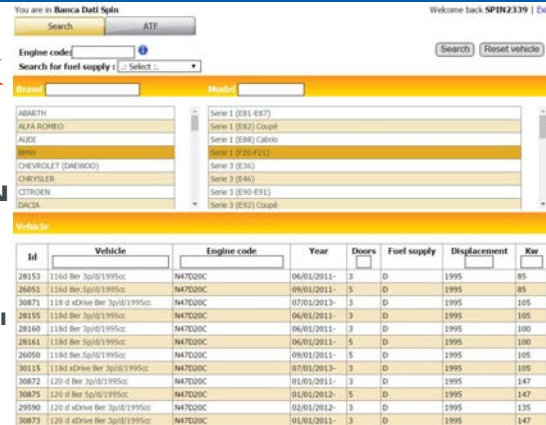

**S-DRIVE 4500
S-DRIVE 5000
ATF 4000 PROFI
ATF START
ATF REMIN**

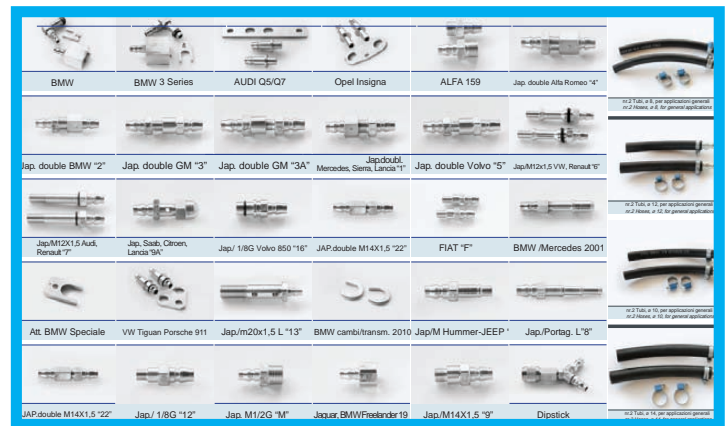

ATF 3000 PRO

