

Atf START

START

ATF START
COD. 02.023.42



IT

- **A:** Display grafico 240x64
- **A:** Tastiera comandi con solo 4 tasti
- **A:** Software a icone di immediata comprensione
- Software intuitivo che si adatta ai differenti modi di operare dell'officina
- **B:** Software multilingue
- **A:** Misura della pressione di ritorno
- **C:** Selezione peso specifico olio (Kg/lt)
- 2 bilance elettroniche
- 1 pompa, 220V50Hz (110V60Hz a richiesta)
- Misura della temperatura dell'olio
- **D:** Possibilità di operare in modo manuale o completamente automatico
- **E:** Protezione da sovrappressioni con funzione "ricircolo automatico" a inizio e a fine carica
- **F:** Compensazione automatica lunghezza tubi
- **G:** Possibilità di aggiornamento software
- **H:** Iniezione additivo manuale
- **I:** Inversione tubi manuale (integrato) (J)
- **J:** Tubi trasparenti per il controllo flusso olio
- **K:** Cassetta raccordi e tubi vetture europee e asiatiche
- **L:** Taniche olio nuovo/usato da 20 lt rimovibili
- **M:** Nuovo filtro sinterizzato con magneti (riusabile)
- **N:** Predisposizione per stampante (fornita a richiesta)
- **O:** Kit INFOPACK (DVD istruzione tecnica in 6 lingue e password per accesso gratuito per 12 mesi alla banca dati)

EN








- **A:** Graphic display 240x64
- **A:** Control keyboard with only 4 buttons
- **A:** User-friendly software with icons
- Intuitive software that adapts to different operation mode of the workshop
- **B:** Multilingual software (22 languages)
- **A:** Measurement of the return pressure
- **C:** Selection of the oil specific weight (kg/lt)
- 2 electronic scales
- 1 pump, 220V50Hz (110V60Hz on request)
- Measurement of the oil temperature
- **D:** Possibility to operate in manual or full automatic mode
- **E:** Protection against overpressure with "automatic recirculation" at the beginning or end of charge
- **F:** Automatic length compensation of the hoses
- **G:** Possibility to update the software
- **H:** Manual additive injection
- **I:** Manual hose inversion device (built-in)
- **J:** Transparent hoses for the oil flow control
- **K:** Case of couplings and hoses for European and Asiatic vehicles
- **L:** Removable new/old oil tanks, capacity 20lt
- **M:** New sintered magnetic filter (reusable)
- **N:** Optional printer
- **O:** Kit INFOPACK (DVD tutorial and free access for 12 months to the Data Base)

ATF START
C l e a n e r & O i l E x c h a n g e r

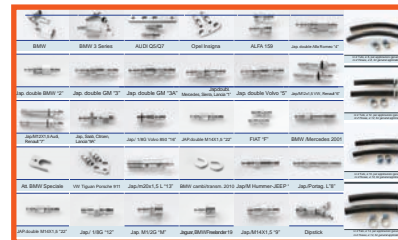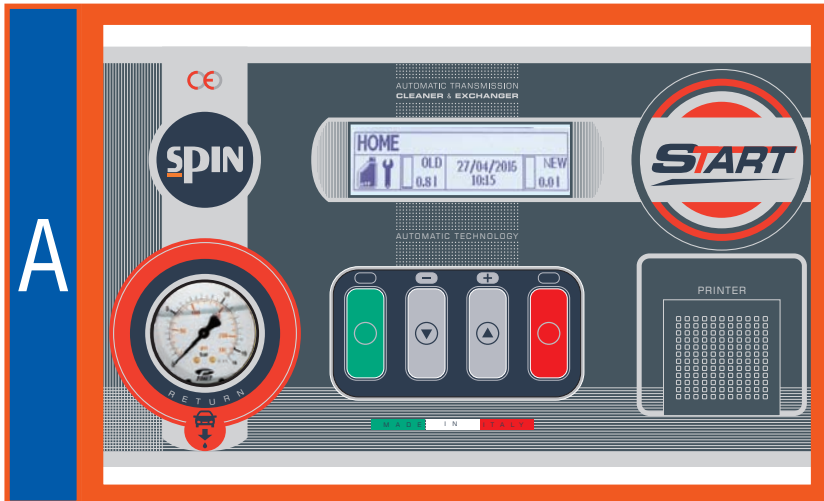

A

K

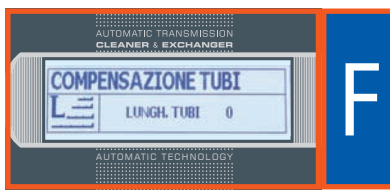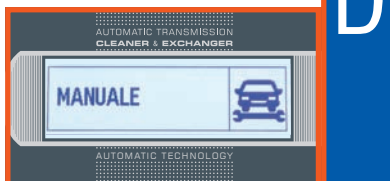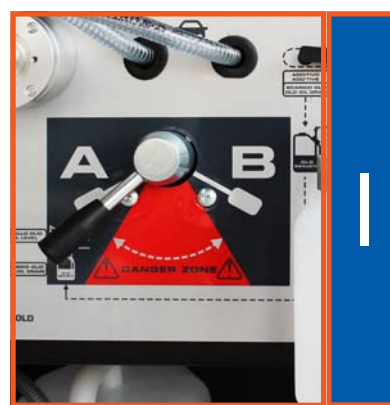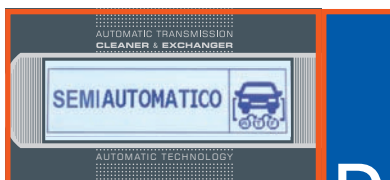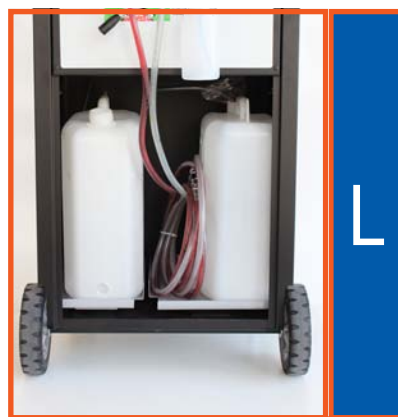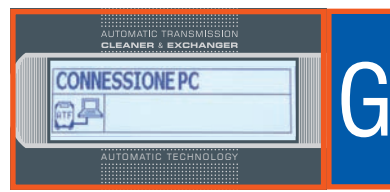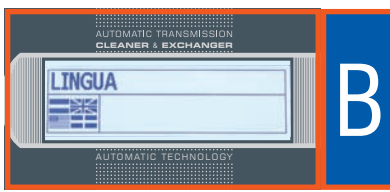

A

K

B

G

C

H

L

D

I

M

E

N

F

J

O

					 NEW!
CARATTERISTICHE TECNICHE	S-DRIVE 4500 cod. 02.023.40	S-DRIVE 5000 cod. 02.023.50	ATF 4000 BASIC cod. 02.023.10	ATF 4000 PROFI cod. 02.023.11	ATF START cod. 02.023.42
Display a colori touch screen 5"	√	√	-	-	-
Display grafico 240x64 monocromatico	-	-	√	√	√
Software a icone di immediata comprensione	√	√	√	√	√
Software multilingue	√	√	√	√	√
Pompa	1	2	2	2	1
Misura olio: 2 bilance elettroniche	√	√	√	√	√
Misura pressione olio uscita cambio	√	√	√	√	√
Misura pressione olio uscita ATF	-	√	√	√	-
Funzione AWS: Correzione automatica peso specifico olio nuovo	√	√	manual	manual	manual
Funzione warm-up automatico (avvio del ciclo automatico al raggiungimento della temperatura minima ottimale)	√	√	-	-	-
Lavaggio circuito di aspirazione olio nuovo	√	√	-	-	-
Misura temperatura olio usato	√	√	√	√	√
Kit dipstick	-	√	√	√	-
Iniezione additivo automatica	√	√	√	√	manuale guidata/ manual guided
Possibilità di operare in modo automatico o manuale	√	√	√	√	semiautomatico
Aggiornamento software e database via USB	√	√	-	-	-
Flussimetri (old/new)	√ illuminati/ backlight	√ illuminati/ backlight	√ illuminati/ backlight	√ illuminati/ backlight	tubi trasparenti, 3 mt/ transparent hoses, 3 mt
Taniche olio nuovo/usato	2 x 20lt	2 x 30lt	2 x 30lt	2 x 30lt	2 x 20lt
Nuovo filtro sinterizzato riutilizzabile con magnete	√	√	√	√	√
2 cassette raccordi e tubi vetture europee e asiatiche	√	√	√	√	√
Stampante	Optional	√	Optional	√	Optional
Kit InfoPack (abbonamento per 12 mesi)	√	√	√	√	√
Software cambio olio servosterzi con adattatori a richiesta	√	√	√	√	-
Banca dati integrata con marca, versione, numero rapporti, tipo di cambio, quantità olio; il raccordo da usare e il tipo/marca di olio è inseribile da parte dell'utente	√	√	-	-	-
Invertitore tubi direzione olio (esterno)	Optional	Optional	Optional	Optional	Integrato Integrated



ATF REMIN
cod. 02.023.55

ATF 3000 PRO
cod. 02.022.70

TECHNICAL FEATURES

-	-	Color touch display 5"
-	-	Monochromatic graphic display 240x64
-	-	Software with icons easy to use
-	-	Multilingual software
1	1	Pump
visiva / visual	visiva / visual	Oil Measurement: 2 electronic scales
✓	✓	Gearbox's outlet oil pressure measurement
-	✓	ATF's outlet oil pressure measurement
-	-	AWS function: Automatic new oil specific weight correction
-	-	Automatic Warm-Up function (starting of the automatic cycle upon reaching the min. optimal temperature)
-	-	Washing of the new oil suction circuit
-	-	Measurement of the waste oil temperature
optional	✓	Dipstick kit
manuale guidata/ manual guided	manuale guidata/ manual guided	Automatic additive injection
manual	manual	Possibility to operate in automatic or manual mode
-	-	Software and database updatable via USB
✓	✓	Flowmeters (old/new)
2x20lt	2 x 25lt con illuminazione/ with led bar	New and waste oil tanks
✓	filtra olio classico/ classic oil filter	New sintered reusable filter with magnet
✓	✓	2 cases of couplings and hoses for European and Asiatic vehicles
-	-	Printer
✓	✓	InfoPack kit (subscription for 12 months)
-	-	Software for power steering oil change with optional adapters
-	-	Integrated database with brand, version, number of ratios, gearbox type, oil quantity, oil code; the connection to be used and the oil type/brand can be inserted manually by the operator
Standard	Optional	Oil flow hose inversion device (external)


ATF

**Accessori INCLUSI
STANDARD accessories**


**InfoPACK
DATABASE**

**FREE ACCESS
TO MORE THAN
4000 MODELS**

**ACCESSO
ALLA BANCA DATI
CAMBI AUTOMATICI
CON PIU' DI 4000 MODELLI**

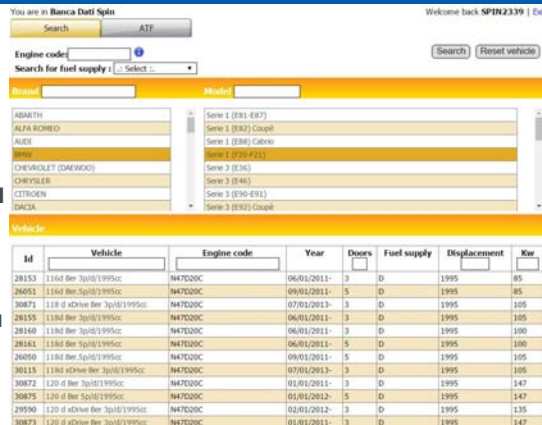

**S-DRIVE 4500
S-DRIVE 5000
ATF 4000 PROFI
ATF START
ATF REMIN**

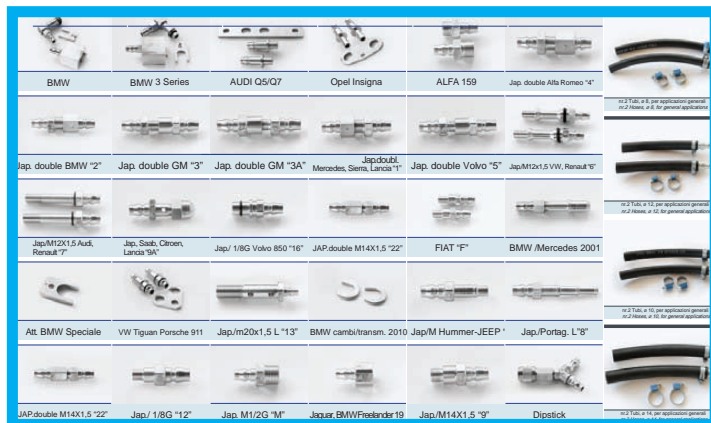

ATF 3000 PRO

